




DEPENBROCK

## REFERENZ HARBOUR CONSTRUCTION AND MARINE ENGINEERING

### Harbour Wyk Föhr Island 1. construction phase

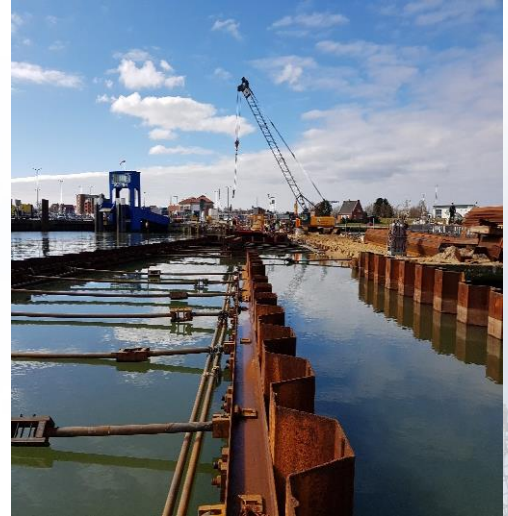

Upgrading of ferry pier 1 in the port of Wyk auf Föhr. The new construction will enable the separation of car and pedestrian traffic. Rehabilitation of the old jetty, some of which is in a state of disrepair, by means of sheet piling with tiebacks consisting of round steel anchors and grouted piles. Reinforcement of the transverse breakwater. Island construction site - complex work preparation. Driving of the coated dolphins with attachments welded on one side under high demands on accuracy.

**Contract volume:**  
5.800.000 €

**Client:**  
Städtischer Hafenbetrieb Wyk auf Föhr  
Achtern Diek 1, 25938 Wyk auf Föhr

**Contact:**  
Herr Koch, Tel.: 04681 – 2606  
Email: [gruen-bau-wyk@t-online.de](mailto:gruen-bau-wyk@t-online.de)

**Construction time:**  
June 2017 - August 2019

**Technical data / main masses:**

Dolphins	120 t
Sheet pile wall	1.200 t
Sand backfill	9.000 m <sup>3</sup>
Concrete	1.000 m <sup>3</sup>
Surface preparation	5.000 m <sup>2</sup>

DEPENBROCK